


Solenoid poppet valve

- 2/2-, 3/2- and 3/4-way type
- $Q_{max} = 40 \text{ l/min}$
- $p_{max} = 350 \text{ bar}$

NG6
ISO 4401-03



II 2 G Ex d II C
II 2 D Ex tD A21 IP65

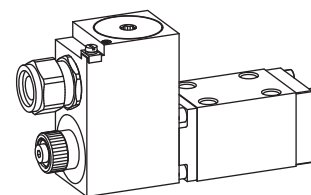

DESCRIPTION

Direct operated poppet valve flange type NG6. Activated with Wandfluh explosion proof solenoid.

The solenoid spool is zinc-/nickel-coated.

Solenoid coil in accordance with directive 94/9/EG (ATEX) for explosion-hazard zones.

Ex: In accordance with European standards EN 60079-0, EN 60079-1 (gas) EN 61241-0, EN 61241-1 (dust)

d: Pressure-proof encapsulation

tD: Protection by the housing

Device group II: For all explosion-hazard zones, except for underground workings

Gas group IIC: Gas groups IIA + IIB included

Device category 2G: For zones 1 and 2 (gas)

Device category 2D: For zones 21 and 22 (dust)

Zones: 1/21 and 2/22

EC-type examination certificate:

PTB 07 ATEX 1023

INSTALLATION

Tightening torque of the coil fixing nut $M_D = 15 \text{ Nm}$. For stack assembly please observe the remarks in the operating instructions.

DESIGNATION

Execution L9:

II 2 G Ex d IIC T6 $T_a = -25...40^\circ\text{C}$

II 2 D Ex tD A21 IP65 T80°C

II 2 G Ex d IIC T4 $T_a = -25...90^\circ\text{C}$

II 2 D Ex tD A21 IP65 T130°C

Execution L15:

II 2 G Ex d IIC T4 $T_a = -25...70^\circ\text{C}$

II 2 D Ex tD A21 IP65 T130°C

FUNCTION

The central functioning element of all directly controlled poppet valves is the poppet valve cartridge NG6. With the controlling solenoid, resp. with the spring located opposite, the poppet valve spools are either opened or closed. Thanks to the poppet valve spool design with the same surface area on both sides and with pressure balancing, no undesirable hydraulic closing - and opening forces are generated. Therefore, the oil flow through the poppet valve is possible in both directions. The valve seals tightly at all closed seats without any oil leakage.

TYPE CODE

| | | | | | | | | | | | | |
|---|---------------------------------|-----------------------------------|--------------------------|---|----|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| 2/2- or 3/2-way construction | A | EXd | <input type="checkbox"/> | 2 | 06 | <input type="checkbox"/> | - | <input type="checkbox"/> | - | <input type="checkbox"/> | # | <input type="checkbox"/> |
| 3/4-way construction | A | EXd | <input type="checkbox"/> | 3 | 4 | 06 | <input type="checkbox"/> | - | <input type="checkbox"/> | - | <input type="checkbox"/> | # |
| International connection standard ISO | | | | | | | | | | | | |
| Explosion protection version | | | | | | | | | | | | |
| 2-way (connections) | <input type="text" value="2"/> | | | | | | | | | | | |
| 3-way (connections) | <input type="text" value="3"/> | | | | | | | | | | | |
| 2 switching positions | | | | | | | | | | | | |
| 4 switching positions | | | | | | | | | | | | |
| Nominal size 6 | | | | | | | | | | | | |
| Normally closed, solenoid on A-side | <input type="text" value="1a"/> | | | | | | | | | | | |
| Normally open, solenoid on B-side | <input type="text" value="0b"/> | | | | | | | | | | | |
| Standard nominal voltage U_N | 12 VDC | <input type="text" value="G12"/> | | | | | | | | | | |
| | 24 VDC | <input type="text" value="G24"/> | | | | | | | | | | |
| | 115 VAC | <input type="text" value="R115"/> | | | | | | | | | | |
| | 230 VAC | <input type="text" value="R230"/> | | | | | | | | | | |
| Nominal power P_N : | 9 W | <input type="text" value="L9"/> | | | | | | | | | | |
| | 15 W | <input type="text" value="L15"/> | | | | | | | | | | |
| Ambient temp by: 40 °C or 90 °C 70 °C | | | | | | | | | | | | |
| Design-Index (Subject to change) | | | | | | | | | | | | |

GENERAL SPECIFICATIONS

| | |
|--------------------------|---|
| Description | 2/2-, 3/2- und 3/4-way poppet valve |
| Nominal size | NG6 acc. to ISO 4401-03 |
| Construction | Direct operated poppet valve |
| Operations | Solenoid |
| Mounting | Flange four mounting holes for cyl. screws, or M5x45 |
| Connections | Threaded connection plates Multi-flange subplates Longitudinal stacking system |
| Admissible ambient temp: | Execution L9: -20...+40 °C (operation as T1...T6/T80 °C) -20...+90 °C (operation as T1...T4/T130 °C) Execution L15: -20...+70 °C (operation as T1...T4/T130 °C) In case of $U_N < 20\text{V}$, the max. ambient temperature has to be reduced by 10 °C. |
| Mounting position | any, preverable horizontal |
| Fastening torque | $M_D = 5,5 \text{ Nm}$ (quality 8,8) |
| Weight: 2/2-, 3/2-way | $m = 3,3 \text{ kg}$ |
| 3/4-way | $m = 5,4 \text{ kg}$ |
| Volume flow direction | any (see characteristics) |

HYDRAULIC SPECIFICATIONS

| | |
|--------------------------|---|
| Fluid | Mineral oil, other fluid on request |
| Contamination efficiency | ISO 4406:1999, class 20/18/14 |
| Verschmutzungsgrad | (Required filtration grade $\beta_{10...16} \geq 75$) refer to data sheet 1.0-50/2 |
| Viscosity range | 12 mm ² /s...320 mm ² /s |
| Admissible fluid temp. | Execution L9: -20...+40 °C (operation as T1...T6/T80 °C) -20...+70 °C (operation as T1...T4/T130 °C) Execution L15: -20...+70 °C (operation as T1...T4/T130 °C) |
| Working pressure | $p_{max} = 350 \text{ bar}$ |
| Max. volume flow | $Q_{max} = 40 \text{ l/min}$, see characteristics |



In case of the execution L15 for ambient temperatures of up to 70 °C the characteristic performance values were established at an ambient temperature of 50 °C.

ELECTRICAL CONTROL


| | |
|--|---|
| Construction | Solenoid, wet pin push, pressure tight |
| Standard-nominal voltage | $U_N = 12 \text{ VDC}, 24 \text{ VDC}, 115 \text{ VAC}, 230 \text{ VAC}$ AC = 50 to 60 Hz $\pm 2\%$ with built-in two way rectifier and recovery diode |
| Voltage tolerance | $\pm 10\%$ of nominal voltage |
| Protection class | IP65 acc. to EN 60 529 |
| Relative duty factor | 100% DF |
| Switching cycles | 12 000/h |
| Operating life | 10^7 (number of switching cycles, theoretically) |
| Connection/Power supply | Through cable entry for cable diameter $\varnothing 11 \dots 14 \text{ mm}$ (acc. to EN 60079-0) |
| Temperature class: | |
| Execution L9 | T1...T6 |
| Execution L15 | T1...T4 |
| Nominal power: | |
| Execution L9 | 9 W |
| Execution L12 | 12 W |
| For further electrical characteristics, refer to the data sheet of the solenoid coil: 1.1-183 | |

SECURITY OPERATED



The solenoid coil must only be put into operation, if the requirements of the operating instructions supplied are observed to their full extent.
In case of non-observance, no liability can be assumed.


SYMBOLS

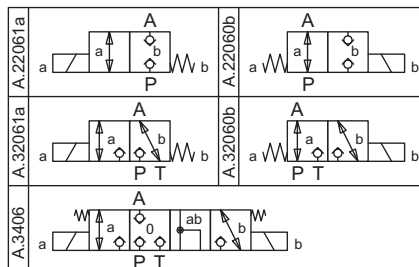

CHARACTERISTICS Oil viscosity $\nu = 30 \text{ mm}^2/\text{s}$

$p = f(Q)$ Performance limits with standard voltage -10%


Execution L15 (measured at 50 °C)

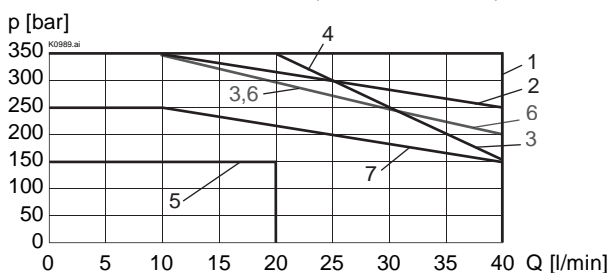

| Type | Flow direction | | | |
|------------|----------------|-------|-------|-------|
| | P - A | A - T | A - P | T - A |
| AEXd22061a | 1 | - | 6 | - |
| AEXd22060b | 1 | - | 3 | - |
| AEXd32061a | 1 | 2 | 5 | 1 |
| AEXd32060b | 1 | 4 | 7 | 1 |
| ABEXd3406 | 1 | 1 | 6 | 6 |


Execution L9/90 °C on request

Execution L9 (measured at 40 °C)

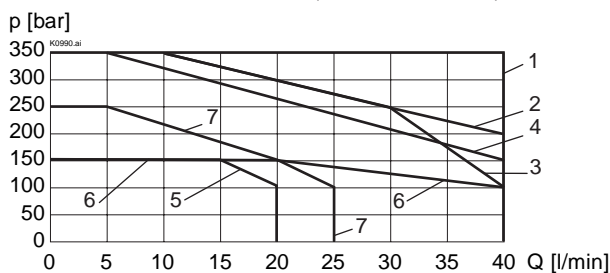


| Type | Flow direction | | | |
|------------|----------------|-------|-------|-------|
| | P - A | A - T | A - P | T - A |
| AEXd22061a | 1 | - | 6 | - |
| AEXd22060b | 1 | - | 3 | - |
| AEXd32061a | 1 | 2 | 5 | 1 |
| AEXd32060b | 1 | 4 | 7 | 1 |
| AEXd3406 | 1 | 1 | 6 | 6 |

$\Delta p = f(Q)$ Pressure loss/flow characteristics

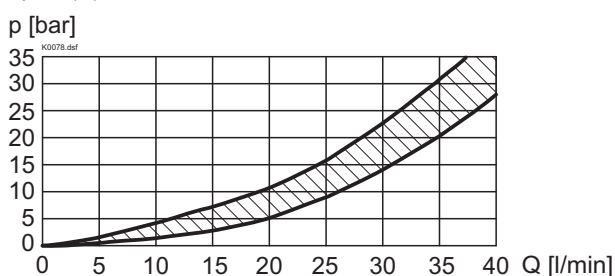

DIMENSIONS


3/4-way poppet valve

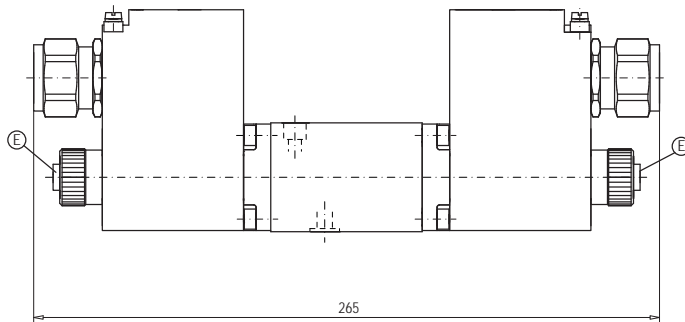

E = air bleed screw


Dimensions of the solenoid coil, refer to data sheet 1.1-183

2/2-, 3/2-way poppet valve

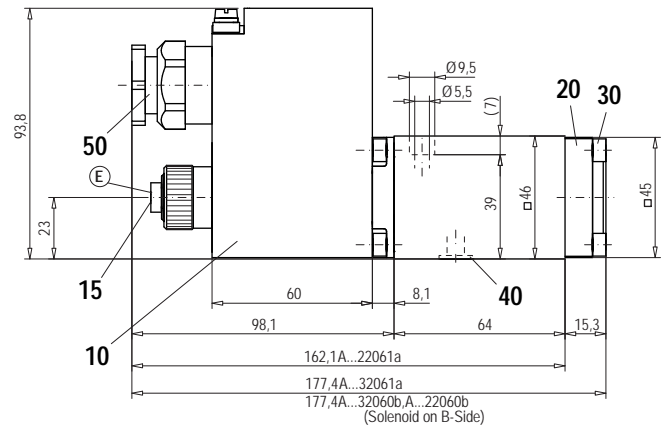

PARTS LIST

| Position | Article | Description |
|----------|-----------|-------------------------------------|
| 10 | 263.6 ... | Coil type MKY 45/18x60-... |
| 15 | 239.2033 | Plug (incl. sealing ring) HB0 |
| 20 | 058.4215 | Cover |
| 30 | 246.2117 | Socket head cap screw M5x16 DIN 912 |
| 40 | 160.2093 | O-ring ID 9,25x1,78 |
| 50 | 111.1080 | Cable entry brass M20x1,5 |

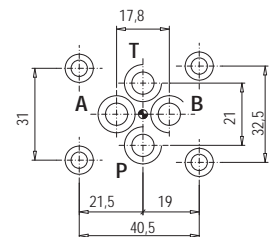

ACCESSOIRES

Threaded connecting plates

see Reg. 2.9

Technical explanation see data sheet 1.0-100