


Poppet valve manually operated

- 2/2-, 3/2- and 3/4-way construction
- $Q_{max} = 80 \text{ l/min}$
- $p_{max} = 350 \text{ bar}$

NG10
ISO 4401-05


DESCRIPTION

Poppet valve, flanged design NG10 according to ISO 4401-05, available as a 2/2 or 3/2-way valve (normally open or closed) and as a 3/4-way valve (normally closed). The central functioning element of all directly controlled poppet valves in the NG10 series is the poppet valve cartridge NG10. See data sheet 1.11-2040.

FUNCTION

The valve is manual lever which in turn either opens or closes the poppet. The design of the poppet spool, which is equal in surface area on both sides and thus pressure balanced, means there are no undue opening and closing hydraulic forces. Due to this the oil flow through the poppet valve is possible in both directions. The valve is tight in both flow directions.

APPLICATION

Wandfluh poppet valves can be used anywhere absolutely leak tight closing functions are important. Completely sealed loading, gripping and clamping operations are all important functions which Wandfluh poppet valves can perform. Cartridge type poppet valves can be neatly accommodated in valve blocks. From a mechanical and functional point of view, poppet valves can replace slide valves at any time.

CONTENT

GENERAL SPECIFICATIONS	1
HYDRAULIC SPECIFICATIONS	1
CONTROL MECHANICAL	1
SYMBOLS	1
CHARACTERISTICS	2
DIMENSIONS	2
PARTS LIST	2
ACCESSORIES	2

TYPE CODE

2/2- or 3/2-way construction	A	H	☐	2	10	☐	#	☐
3/4-way construction	A	H	3	4	10		#	☐
Mounting interface								
Manual lever								
2-way (connections)			☐					
3-way (connections)			☐					
2 position								
4 position								
Nominal size 10								
Normally closed, Manual level on A-side			☐					
Normally open, Manual level on B-side			☐					
Design-Index (Subject to change)								

GENERAL SPECIFICATIONS


Description	2/2-, 3/2- and 3/4-way poppet valve
Nominal size	NG10 acc. to ISO 4401-05
Construction	Direct operated poppet valve
Operations	manually operated
Mounting	Flange, 4 mounting holes for socket head screws M6x65
Connections	Threaded connection plates Multi-flange subplates Longitudinal stacking system
Ambient temperature	-20...+50°C
Mounting position	any, preferable horizontal
Fastening torque	$M_b = 9,5 \text{ Nm}$ (quality 8,8)
Weight: 2/2-, 3/2-way	$m = 3,6 \text{ kg}$
3/4-way	$m = 4,4 \text{ kg}$
Volume flow direction	any (see characteristics)

CONTROL MECHANICAL

Force	$F_{b \max} = 20-120 \text{ N}$ (depending on flow direction and pressure)
Angle	$\alpha_b = 11^\circ$


HYDRAULIC SPECIFICATIONS

Fluid	Mineral oil, other fluid on request
Contamination efficiency	ISO 4406:1999, class 20/18/14 (Required filtration grade $\beta_{10} \dots 16 \geq 75$) refer to data sheet 1.0-50/2
Viscosity range	12 mm ² /s...320 mm ² /s
Fluid temperature	-20 ... +70°C
Working pressure	$p_{max} = 350 \text{ bar}$
Max. volume flow	$Q_{max} = 80 \text{ l/min}$ see characteristics

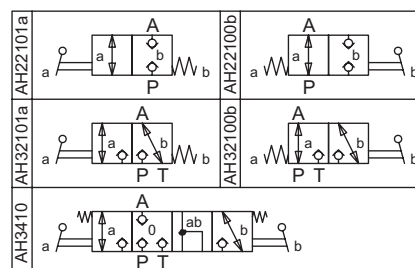SYMBOLS


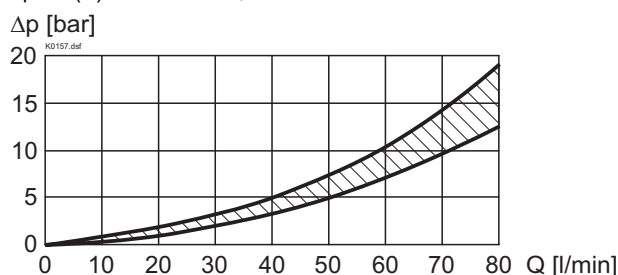
CHARACTERISTICS Oil viscosity $\nu = 30 \text{ mm}^2/\text{s}$

$p = f(Q)$ Performance limit

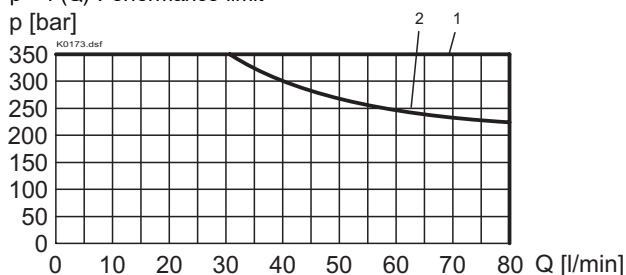


Type	Flow direction			
	P - A	A - T	A - P	T - A
AH22101a	1	-	1	-
AH22100b	1	-	2	-
AH32101a	1	2	1	1
AH32100b	1	1	2	1
AH3410	1	1	1	1

$\Delta p = f(Q)$ Pressure loss/flow characteristics




DIMENSIONS

3/4-way poppet valve

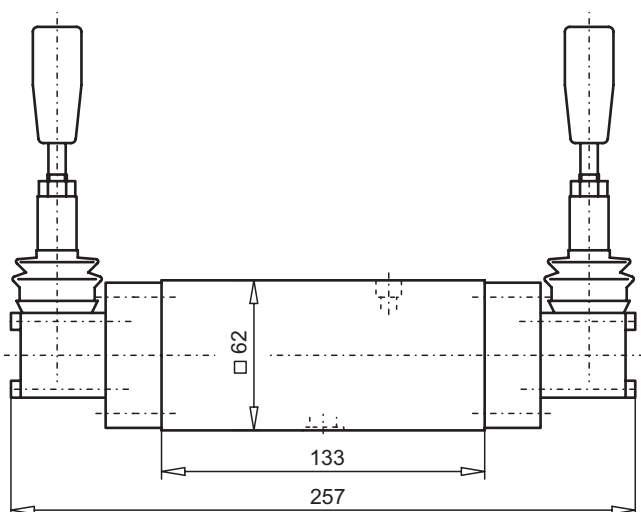

2/2-way poppet valve
3/2-way poppet valve

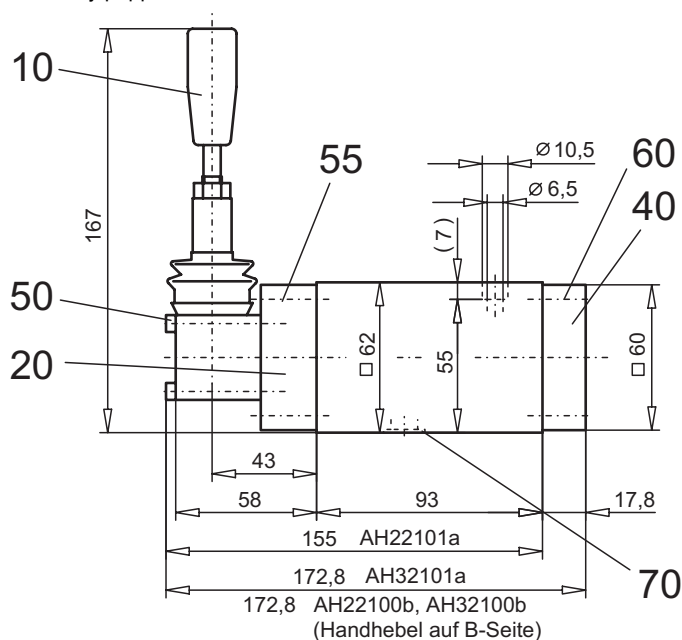

PARTS LIST

Position	Artikel	Beschreibung
10	253.2000	Manual pilot head BHII
20	074.2813	Flange
40	059.2200	Cover
50	246.1140	Socket head cap screw M4x40 DIN 912
55	246.3125	Socket head cap screw M6x25 DIN 912
60	246.3121	Socket head cap screw M6x20 DIN 912
70	160.2140	O-ring ID 14x1,78

ACCESSORIES

Threaded connection plates, Multi-flange subplates and Longitudinal stacking system see Register 2.9

Technical explanation see data sheet 1.0-100E

